




Wall-Mounted Slewing Cranes

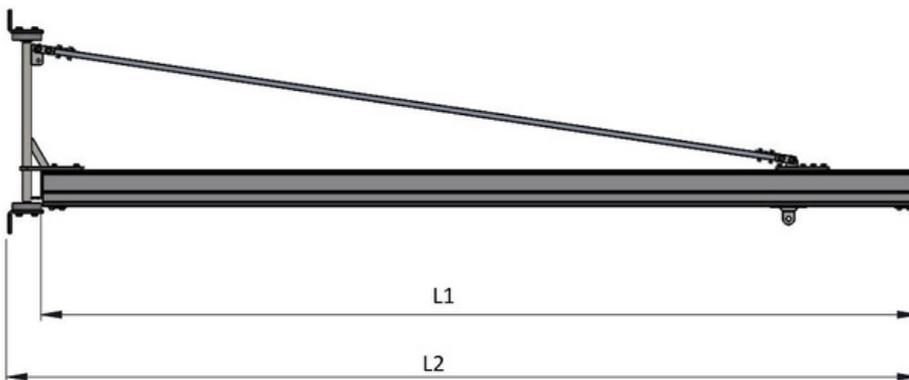

JLM Teknik's wall-mounted slewing cranes with an anodized aluminium jib arm. All moving parts are equipped with bearings. Delivered with a trolley and cable trolleys. The crane can also be supplied in stainless steel.

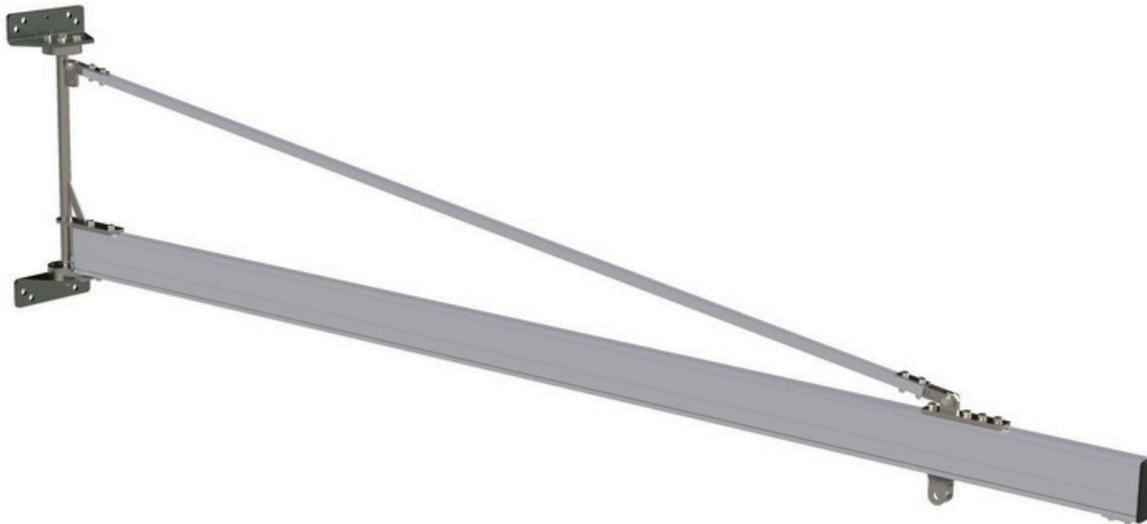

Wall-mounted



Type	WLL	Diagonal /profile	Rail length (L1)	Total length (L2)	Height (H1)	Hole spacing (H2)	Hole spacing (H3) 690	Hole spacing (B1) 200	Hole spacing (B2) 150
VK380111	80 kg	1-Mini	3000 mm	3120 mm	770 mm	730 mm	mm	mm	mm
VK480121	80 kg	2-Mini	4000 mm	4120 mm	770 mm	730 mm	690 mm	200 mm	150 mm
VK580121	80 kg	2-Mini	5000 mm	5120 mm	770 mm	730 mm	690 mm	200 mm	150 mm
VK680222	80 kg	2-Maxi	6000 mm	6120 mm	910 mm	870 mm	830 mm	200 mm	150 mm
VK412532	125 kg	2-Maxi	4000 mm	4120 mm	910 mm	870 mm	830 mm	200 mm	150 mm
VK5125322	125 kg	2-Maxi	5000 mm	5120 mm	910 mm	870 mm	830 mm	200 mm	150 mm
VK61253232	125 kg	2-Mega	6000 mm	6120 mm	910 mm	870 mm	830 mm	200 mm	150 mm
VK5150323	150 kg	2-Mega	5000 mm	5120 mm	910 mm	870 mm	830 mm	200 mm	150 mm
VK3250212	250 kg	1-Maxi	3000 mm	3120 mm	910 mm	870 mm	830 mm	200 mm	150 mm
VK4250222	250 kg	2-Maxi	4000 mm	4120 mm	910 mm	870 mm	830 mm	200 mm	150 mm
VK4320323	320 kg	2-Mega	4000 mm	4120 mm	910 mm	870 mm	830 mm	200 mm	150 mm
VK3350313	350 kg	1-Mega	3000 mm	3120 mm	910 mm	870 mm	830 mm	200 mm	150 mm

